


Predator CXC 200

11-Gallon Tank Extractor

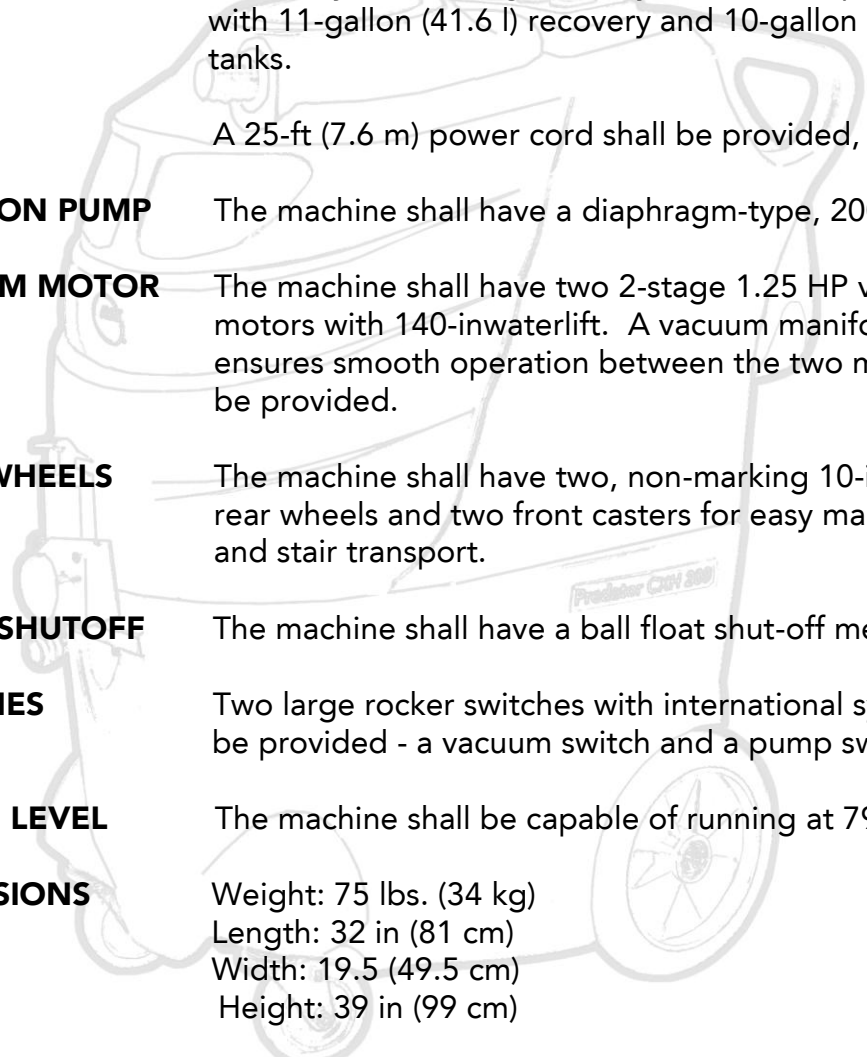

GENERAL	The machine shall be an 11-gallon, compact cold-water tank extractor.
CONSTRUCTION	The body shall be high density rotomolded polyethylene, with 11-gallon (41.6 l) recovery and 10-gallon (38 l) solution tanks.
CORD	A 25-ft (7.6 m) power cord shall be provided, rated 12/3.
SOLUTION PUMP	The machine shall have a diaphragm-type, 200 PSI pump.
VACUUM MOTOR	The machine shall have two 2-stage 1.25 HP vacuum motors with 140-in waterlift. A vacuum manifold, which ensures smooth operation between the two motors, shall be provided.
MAIN WHEELS	The machine shall have two, non-marking 10-in. (25.4 cm) rear wheels and two front casters for easy maneuverability and stair transport.
FLOAT SHUTOFF	The machine shall have a ball float shut-off mechanism.
SWITCHES	Two large rocker switches with international symbols shall be provided - a vacuum switch and a pump switch.
SOUND LEVEL	The machine shall be capable of running at 79 dBA.
DIMENSIONS	Weight: 75 lbs. (34 kg) Length: 32 in (81 cm) Width: 19.5 (49.5 cm) Height: 39 in (99 cm)
WARRANTY	The machine shall have a 1 year limited warranty against defects in material and workmanship, and 10 years on the rotomolded polyethylene parts.
ISO 9000	NSS Enterprises, Inc. has been ISO 9001 registered since September 23, 1998.

Features & Benefits

Demonstration Guide

Competitive Comparison

Bid Specifications

Recommended Parts Stock

Supplemental Price List



Integrity at work.