


# Surge CXC 1200

## 11-Gallon Dual Surface Cleaner

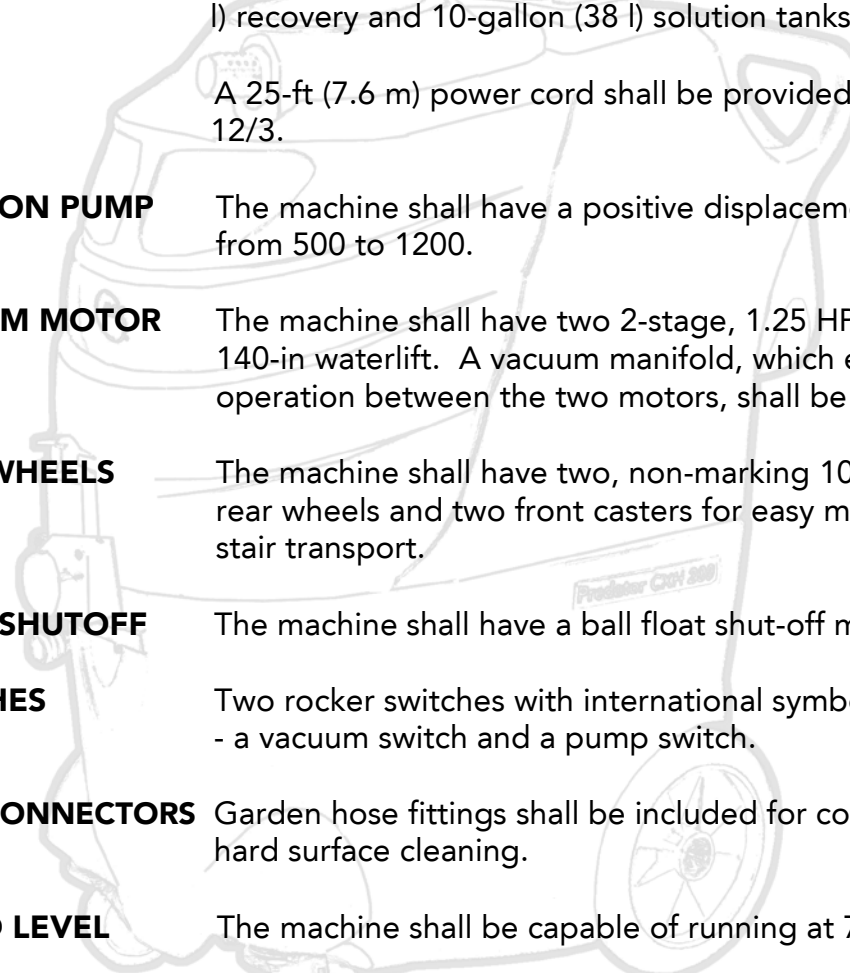

<b>GENERAL</b>	The machine shall be an 11-gallon, dual surface cleaner, used as a hard floor cleaner at 1200 PSI or as a carpet extractor at 500 PSI.
<b>CONSTRUCTION</b>	The body shall be rotomolded polyethylene, with 11-gallon (41.6 l) recovery and 10-gallon (38 l) solution tanks.
<b>CORD</b>	A 25-ft (7.6 m) power cord shall be provided, conductor gauge 12/3.
<b>SOLUTION PUMP</b>	The machine shall have a positive displacement pump, variable from 500 to 1200.
<b>VACUUM MOTOR</b>	The machine shall have two 2-stage, 1.25 HP vacuum motors with 140-in waterlift. A vacuum manifold, which ensures smooth operation between the two motors, shall be provided.
<b>MAIN WHEELS</b>	The machine shall have two, non-marking 10-in. (25.4 cm) rear wheels and two front casters for easy maneuverability and stair transport.
<b>FLOAT SHUTOFF</b>	The machine shall have a ball float shut-off mechanism.
<b>SWITCHES</b>	Two rocker switches with international symbols shall be provided - a vacuum switch and a pump switch.
<b>HOSE CONNECTORS</b>	Garden hose fittings shall be included for continuous use during hard surface cleaning.
<b>SOUND LEVEL</b>	The machine shall be capable of running at 75 dBA.
<b>DIMENSIONS</b>	Weight: 135 lbs. (61 kg) Length: 32 in (81 cm) Width: 19.5 in (49.5 cm) Height: 39 in (99 cm)
<b>WARRANTY</b>	The machine shall have a 1 year limited warranty against defects in material and workmanship, and 10 years on the rotomolded polyethylene parts.
<b>ISO 9000</b>	NSS Enterprises, Inc. has been ISO 9001 registered since September 23, 1998.

Features & Benefits

Demonstration Guide

Competitive Comparison

Bid Specifications

Recommended Parts Stock

Supplemental Price List



Integrity at work.