

Pacer 112 UE

Single-Motor Upright Vacuum

GENERAL	The machine shall be a 12-in. (30 cm) single-motor upright vacuum with onboard upholstery and crevice tools.
CLEANING PATH	The machine shall vacuum a 12-in. (30 cm) path.
MOTOR	The motor shall be 1.5 HP, and shall power the Chevron brush and the vacuum suction.
CLUTCH	The motor shall have a mechanical clutch that will protect the motor from overload if something becomes jammed in the brush.
BRUSH	The brush shall have a removable brush. The brush shall be accessed without the use of tools.
FILTRATION	The machine shall have a three-stage filtration system. The machine shall have a top-filling paper filter bag. The machine shall also include a vacuum motor filter (located below the paper filter) to provide added filtration in case of a tear or spillage from the paper bag. The machine shall also include an exhaust filter to trap additional particles and carbon dust created by the vacuum motor. For added Indoor Air Quality (IAQ), the machine shall offer a HEPA filter to trap particles as small as 0.3 microns. The machine shall be equipped with a “bag full” indicator light to indicate when the filter bag needs to be changed or if there is a clog in the vacuum path.
TOOLS	The machine shall have an on-board tool kit consisting of crevice and upholstery tools. The machine shall also have a built-in two-piece wand with telescoping hose to reach high areas and low areas without operator having to bend over.
SWITCH	The machine shall have a rocker-type, on/off switch located on the front of the machine.
CORD	The cord shall be 40-ft. (12.2 m) long, in safety yellow and of the 18-3 SJT type with quick-release cord wrap.
CONSTRUCTION	The body of the machine shall be constructed composite polypropylene. The machine shall also contain a wrap-around bumper for protection of walls and furniture. The support arms shall be constructed of die-cast aluminum.

Features & Benefits

Demonstration Guide

Competitive Comparison

Bid Specifications


Recommended Parts Stock

Supplemental Price List



Pacer 112 UE Specifications (continued)

HOSE	The machine shall have a hose connection between the base and housing which is removable to access clogs. The suction wand shall be two-piece in order to dis-assemble to check for clogs as well.
SOUND LEVEL	The sound level shall be 67 dbA or less at the operator position.
DIMENSIONS	The machine must weigh no more than 18 lbs., must be less than 13 in. wide, and must be less than 49 in. high.
UL / ULC LISTING	The machine shall be listed by UL and ULC.
CRI LISTING	The machine shall be listed with the Carpet and Rug Institute.
ISO 9000	The manufacturer must be ISO 9001 registered.
WARRANTY	The machine shall have a 2-year limited warranty.

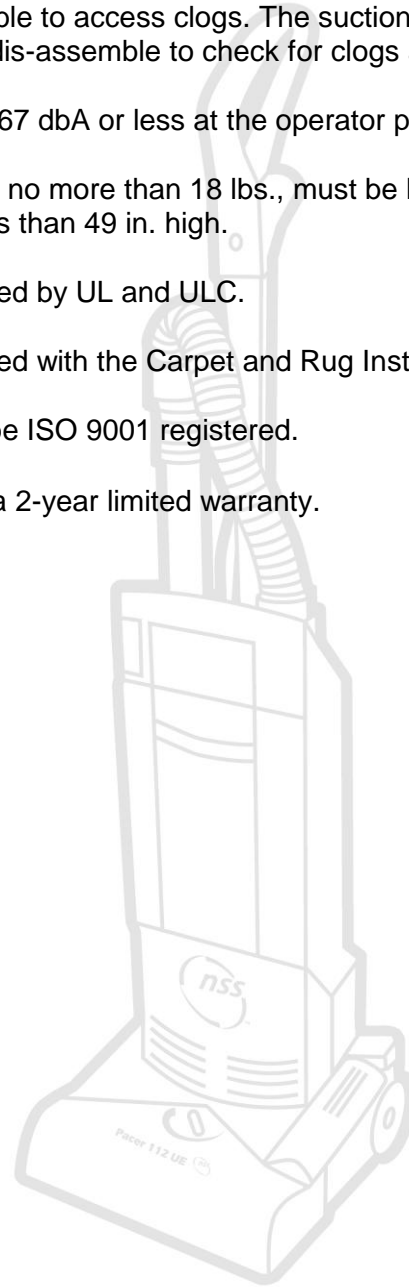

Features &
Benefits

Demonstration
Guide

Competitive
Comparison

Bid
Specifications

Recommended
Parts Stock

Supplemental
Price List

More Than Meets The Floor

