

Bronco 4

4-Gallon Wet/Dry Vacuum

GENERAL	The machine shall be an industrial, tank-type vacuum cleaner with a tool kit, designed for wet/dry recovery.
MOTOR	The motor shall be a two-stage bypass-type motor. The single-motor horsepower shall be 1.34 HP (1,000 watts). The tank deflector shall cyclonically separate dirt and direct it to the bottom of the tank so as to maintain maximum suction through a job. The motor shall have a float shut-off device which activates to protect vacuum motor fans.
WATERLIFT	The closed waterlift shall be 72 in (183 cm).
CFM	The CFM shall be 102 in (259 cm) at 1.5 orifice.
TANK CAPACITY	The recovery capacity shall be 0.42 dry bushel (15 l) and 4 gal (15 l) wet. The tank shall be constructed of heavy-duty polyethylene.
FILTER	The filter shall be a polyester type (which will not shrink or rot), and the filter area shall be 302 in ² (1,948 cm ²).
SOUND LEVEL	The machine shall have a sound level of 69 dBA at the operator position.
MOUNTING	The machine shall be highly maneuverable, with two 4-in (10 cm) wheels, and two 2-in (5 cm) casters.
CORD	The cord shall be 14 ft (4.2 m) with a 14-3 SJT, safety yellow.
TOOL KIT	The machine shall have a 7-piece tool kit that includes a 2-piece wand, hose, round brush, squeegee tool, bare floor tool, and crevice tool.
DIMENSIONS	Weight: 19 lbs (8.6 kg) Height: 22.5 in (57 cm) Width: 14.5 in (37 cm) Length: 14.0 in (35.5 cm)

Features & Benefits

Demonstration Guide

Competitive Comparison

Bid Specifications

Recommended Parts Stock

Supplemental Price List

Bronco 4

4-Gallon Wet/Dry Vacuum


(Bid Specifications continued)

ISO 9000

The manufacturer must be ISO 9001 registered.

WARRANTY

The machine shall carry a 1-year warranty against defects in material and workmanship.

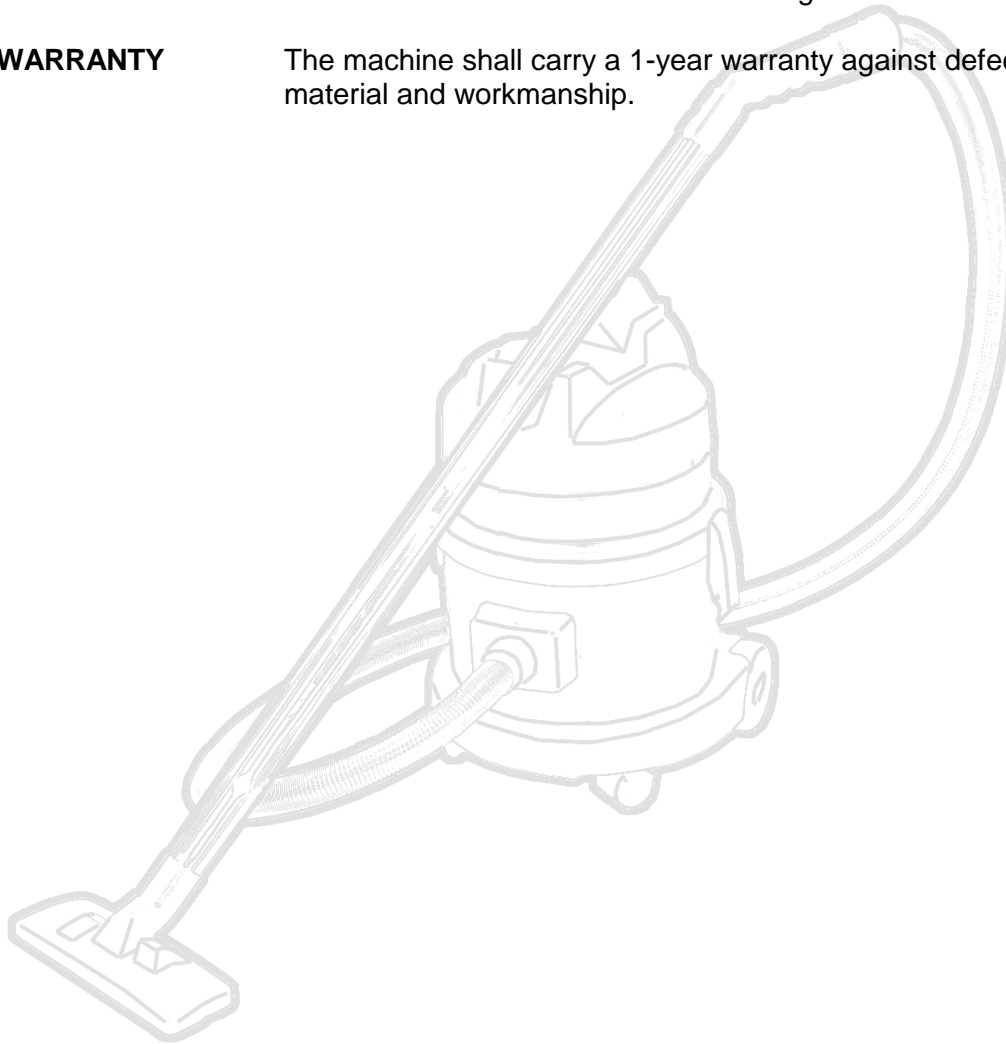

Features & Benefits

Demonstration Guide

Competitive Comparison

Bid Specifications

Recommended Parts Stock

Supplemental Price List