



AquaForce

Pressure Washers



1500A & 1500AHT

- Hand-carry model.
- 2.0 HP electric motor.
- Adjustable pressure, up to 1450 psi.
- AHT model accepts water up to 180°F.



1000MXDE

- High performance Cat pump.
- Dual chemical injection.
- Tip-back transport cart.
- 2.2 gallons per minute delivery system.



1500AMXDE

- 1450 PSI pump.
- Dual chemical injection.
- Tip-back transport cart.
- 2 gallons per minute delivery system.



2000GHX

- Gas-powered 5 HP Honda engine.
- Transport cart.
- 2000 psi of pressure.
- Delivers 2.2 gallons per minute.



25006HX

- Industrial applications.
- Metal tube frame.
- Gas-powered 6.5 HP Honda engine.
- 2500 psi pump.

NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com




Printed on Green Seal® certified paper that contains 30% recycled post-consumer fiber.

AquaForce is the line of pressure washers from NSS Enterprises, Inc. that is available in hand-carry models, cart electrics, and gasoline-powered units.

AquaForce Specifications

Model	1500A	1500AHT	1000MXDE	1500AMXDE	2000GCX	25006HX
Part Number	7702008	7702010	7702004	7702007	7702014	7702016
Pressure	1500 PSI 100 bar	1500 PSI 100 bar	1000 PSI 69 bar	1450 PSI 100 bar	2000 PSI 138 bar	2500 PSI 172 bar
Flow	2 GPM 7.5 LPM	2 GPM 7.5 LPM	2.2 GPM 8.3 LPM	2 GPM 7.5 LPM	3 GPM 11.3 LPM	3 GPM 11.3 LPM
Power	2 HP	2 HP	1.5 HP	2 HP	5 HP	6.5 HP
Volts/Amps	110/15	110/15	110/15	110/15	Gasoline-powered	Gasoline-powered
Pump Max. Water Temp.	140°F 60°C	180°F 82°C	180°F 82°C	180°F 82°C	140°F 60°C	165°F 74°C
Dimensions						
Length	18 in 46 cm	18 in 46 cm	32 in 81 cm	32 in 81 cm	30 in 76 cm	30 in 76 cm
Width	12 in 30.5 cm	12 in 30.5 cm	22 in 56 cm	22 in 56 cm	21.5 in 54.5 cm	21.5 in 54.5 cm
Height	11 in 28 cm	11 in 28 cm	39 in 99 cm	39 in 99 cm	36 in 91.5 cm	36 in 91.5 cm
Weight	68 lbs 31 kg	68 lbs 31 kg	106 lbs 48 kg	118 lbs 53.5 kg	95 lbs 43 kg	108 lbs 49 kg
Shipping Class	92.5	92.5	92.5	92.5	92.5	92.5
Warranty	1 year	1 year	1 year	1 year	1 year	1 year

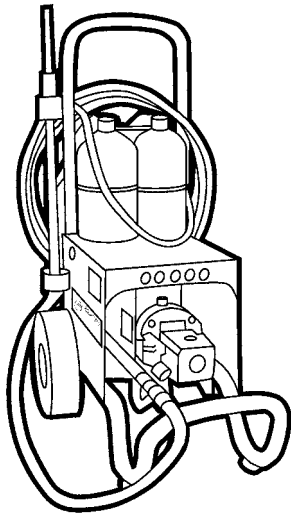

All AquaForce washers include a trigger gun, insulated wand and hose.



High pressure water allows a minimum of chemicals to be used, meaning less harmful chemicals left behind.

Pumps able to accept extremely hot water (140-180°F) allows cleaning without harsh chemicals.

Transport carts mean easy, ergonomic transport between job sites.



NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, OH 43607-2958
USA

P: (800) 677-1663
F: (419) 531-3761

mailus@nss.com
www.nss.com

Specifications subject to change without notice.

DISTRIBUTED BY

Printed in USA

©2009 NSS Enterprises, Inc.

#9097701 REV D 5/09