



# Pony 20 SCA

## Automatic Carpet Extractor



A large 20-gallon capacity and 22-inch power brush make the self-propelled Pony 20 SCA carpet extractor perfect for wide-open, carpeted areas.

- With its 3-stage vacuum motor and 100 PSI bypass-type solution pump, the Pony has the power to blast solution into the nap and the suction to remove carpet dirt in a single pass.
- The variable-speed drive motor allows the operator to match working speed to carpet conditions. Compared to a box extractor, The Pony 20 SCA cleans carpet in half the time and is less fatiguing to operate.
- A built-in spray wand makes pre-cleaning spots and high traffic areas quick and easy.
- The spring-loaded brush housing, with quick quarter-turn removable nozzles, is offset to clean up to the baseboard. A floating brush and lock-down swinging vacuum shoe assure the Pony 20 SCA provides aggressive cleaning performance while minimizing drying time.
- Built for the rigors of heavy-duty commercial use, the Pony features a flap-type float shut-off, hinged polyethylene body, and a welded steel base.


**NSS Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958  
USA  
[www.nss.com](http://www.nss.com)




Printed on Green Seal® certified paper that contains 30% recycled post-consumer fiber.

# Pony 20 SCA Specifications

<b>Tank capacity</b>	
Solution	20 gal (76 L) with solution level indicator
Recovery	20 gal (76 L)
<b>Solution Pump</b>	
Type	100 PSI, bypass, 115V (240V available)
<b>Vacuum Motor</b>	
Type	3-stage bypass, 115V (240V), 1.75 HP
Closed Waterlift	125 in (318 cm)
<b>Drive Motor</b>	
Type	0.05 HP, variable speed, 115V (240V)
<b>Current</b> 15 amps	
<b>Brush Motor</b>	
Type	Perm. magnet, 0.25 HP, 115V (240V)
RPM	2,100
<b>Construction</b>	
Tanks	Rotocast polyethylene
Base	Steel welded
Housing	Mounted on hinges
Spray Jets	5 stainless steel snap-in jets on bar
Wheels	Two 8 in (20 cm) roller bearing
Casters	Two 4 in (10 cm) ball bearing swivel
Vacuum Shoe	Cast aluminum with steel plate
<b>Bottle Holder</b>	Molded, holds 2 bottles
<b>Acc. Spray Wand</b>	Built-in, wand holder at rear of machine
<b>Brush</b>	22 in (56 cm) cylindrical
<b>Brush Housing</b>	2-piece, allows easy access to brush
<b>Cord</b>	12-3 SJT, detachable twist-lock, 75 ft
<b>Sound Level</b>	75 dBA @ operator
<b>Accessory Valve</b>	Quick couple type, all brass
<b>Drain Mechanism</b>	Dump hoses on both tanks
<b>Float Shut-Off</b>	Flap type
<b>Dimensions</b>	
Height	41 in (104 cm)
Width	23.5 in (60 cm)
Length	47 in (119 cm)
<b>Weight</b>	
Machine	165 lbs (73 kg)
Shipping	204 lbs (93 kg)
<b>Shipping Class</b>	125
<b>Warranty</b>	3 year limited, 10 years on poly parts
<b>Productivity</b>	4,183 sq ft per hour (389 m <sup>2</sup> )

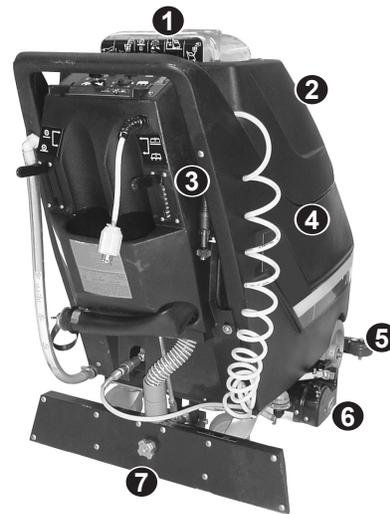

Quick disconnect spray bar slides out easily.



Hinged body allows access to internal components.

- 1 The clear dome allows viewing the reclaimed liquid.
- 2 Durable 20-gal (76 L) polyethylene tanks do not rust or corrode; they're warranted for 10 years.
- 3 Built-in spray wand allows the operator to pretreat high traffic areas.
- 4 The tank-over-tank design of the Pony 20 SCA improves sight lines and keeps the machine balanced from job start to finish.
- 5 The non-marking guide wheel lets the operator extract carpaeting right up to the wall.
- 6 Spring-loaded brush head is offset to clean right to the wall.
- 7 Cast aluminum vacuum shoe floats on the carpet surface. It swings on turns to ensure maximum vacuum coverage of the scrub path.



Hand tools and hoses are available for stairs and upholstery.

**DO NO HARM™**

The Pony 20 SCA has a recycleable welded steel frame.

The tank-over tank design keeps the machine balanced throughout operation.

The wheel drive feature of this machine allows for easy extracting, reducing operator fatigue.



**NSS Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, OH 43607-2958  
USA

P: (800) 677-1663  
F: (419) 531-3761

mailus@nss.com  
www.nss.com

Specifications subject to change without notice.

DISTRIBUTED BY