



NSS Enterprises, Inc.

## 26" WALK-BEHIND SCRUBBER

# WRANGLER 2616 DB

The Wrangler 2616 DB delivers high-productivity and cleaning performance you can count on. It is a perfect fit for hard floor cleaning programs found in retail, convenience stores, healthcare, schools, airports and hospitality.

- Built for daily commercial use. The Wrangler 2616's rugged construction ensures it is ready to work when you need it.
- Simple controls. Operated by just a few switches and mechanical levers, custodians can be ready to clean with just a few minutes of training.
- Cost-effective efficiency. The Wrangler 2616 DB is an extraordinary value. Save labor with a large scrub deck on a machine that fits into your budget.



**DO NO HARM™**


Stainless steel hardware, durable steel framework and heavy-duty rotomolded tanks keep the Wrangler 2616 DB on the job, and out of the landfill, for years.

Printed on Green Seal® certified paper that contains 30% recycled post-consumer fiber.

## SPECIFICATIONS

# WRANGLER 2616 DB

Cleaning Path	26 in (64 cm)	
Brush/Pad	2 x 13 in	
Solution Tank	16 gal (61 L)	
Recovery Tank	17 gal (64 L)	
Solution Flow Rates	0 to 1.0 GPM, manual valve	
Brush Motor (HP)	0.50 (380 W)	
Brush Motor (RPM)	150 RPM	
Pad Pressure	70, 100 lbs (32, 45 kg)	
Vacuum Motor (HP)	0.75 (560 W)	
Vacuum Motor (CFM)	65	
Water Lift (in)	58	
Drive Motor (HP)	0.33 (250 W)	
Drive Wheel	Two 8" x 2"	
Wheel Material	Non-marking rubber with non-slip tread	
Drive Speed	Forward: 200 ft/min (61 m/min) Reverse: 125 ft/min (38 m/min)	
Batteries, Quantity	4 x 6V	
Batteries, Type and Size	220 AH AGM or 235 AGM Wet	
Run Time (Hours)	Up to 3.2 hours	
220 AH AGM	Up to 3.5 hours	
235 AH Wet		
Sound Level (dBA)	65 dBA	
Productivity (ft <sup>2</sup> /hr)		
Theoretical	25,999 (2,415 m <sup>2</sup> /hr)	
Practical	12,062 (1,120 m <sup>2</sup> /hr)	
Dimensions	57 x 30 x 39.5 in	
L x W x H	145 x 76 x 100 cm	
Weight (Lbs)	Shipping	Machine
220 AH	633 (287 kg)	527 (239 kg)
235 AH	665 (301 kg)	559 (254 kg)
Warranty	3 years parts, 10 years on tanks	

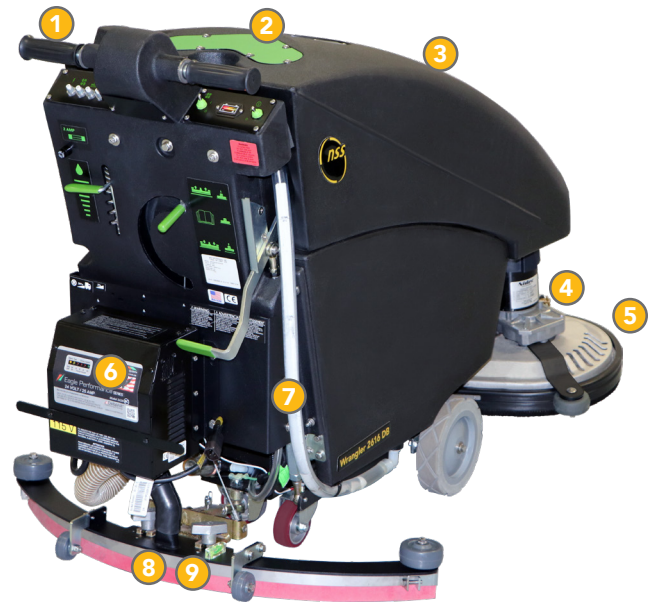

1. Ergonomic handle grips and an easy to use twist throttle to control working speed.
2. The percolator breaks down foam, protecting the vacuum motor from damage.
3. The float shut-off protects the vacuum motor from liquid or foam damage.
4. A solenoid valve near the brush head prevents solution flow when the brushes are not moving.
5. The scrub head lifts and tilts to make pad changes easier.
6. The on-board battery charger allows charging anytime, anywhere.
7. The clear solution tank hose shows the amount of cleaning solution and can be used to drain the solution tank.
8. The 32-inch squeegee swings wide on turns to leave the floor drier. The breakaway design protects the machine and facility if it catches on a surface.
9. (Optional) This scrubber comes with a Linatex squeegee blade. Natural rubber and oil-resistant Urethane squeegee blades are available as after market replacement items.



## NSS ENTERPRISES, INC.

3115 Frenchmens Road  
Toledo, OH 43607-2958  
USA

(800) 677-1663 **TEL**  
(419) 531-3761 **FAX**  
info@nss.com

## OPTIONS AND ACCESSORIES



Monitor machine use through the internet. Sentry helps you manage your fleet by reporting machine usage, charge cycles and more.



Wet pick-up kit (Part 2392129) includes a 2-piece steel wand, 7 ft vacuum hose and a 15" squeegee tool. Vacuum hard to reach areas away from the machine.



Ecostrip 400 pads are coated with a specially formulated diamond abrasive that can remove layers of floor finish without stripping chemicals.

NSS.COM