



NSS Enterprises, Inc.

HEAVY-DUTY FLOOR MACHINE

MUSTANG 17/20/DS

For a durable, powerful floor machine in an economical package, choose the Mustang. Precision-balanced for easy operation and maneuverability, this machine scrubs, strips, spray buffs, polishes and shampoos.

- Dependable operation. Powder-coated steel skirt and a heavy-duty motor provide year after year of service.
- Safety lock-out. The mechanical lock-out switch on the Mustang prevents accidental starts.
- Standard models to fit any application and budget.
 - Pad Size: 17" or 20"
 - Motor Power: 1.0 HP or 1.5 HP
- Dual Speed (DS) model for added versatility.
 - The Dual Speed model changes from 180 RPM to 300 RPM at the flip of a switch. Use low speed for scrubbing and high speed for polishing and carpet bonnet cleaning.
 - Pad Size: 17" or 20"



DO NO HARM™


The Mustang can be used to spray buff and damp strip. Repair and restore worn floor finish in high traffic areas without using chemicals to strip the entire area.

Printed on Green Seal® certified paper that contains 30% recycled post-consumer fiber.

SPECIFICATIONS

MUSTANG 17/20/DS

Model	Standard 17 / 20		Dual Speed (DS)	
Pad Size	17 in (43 cm) or 20 in (51 cm)			
Pad Speed (RPM)	155		180 or 300	
Pad Driver	Flexible polypropylene			
Input Voltage	120V or 240V			
Motor Options	1.0 HP 1.5 HP		1.5 HP	
Current	15A at 115V (Typical conditions) 7.5A at 240V (Typical conditions)			
Overload Protection	None			
Drive	2-idler planetary gear, 11:1 Ratio (1.0 HP models) 3-idler planetary gear, 11:1 Ratio (All other models)			
Construction	Powder-Coated Steel			
Wheels	5 in (13 cm) non-marking			
Handle	14-gage chrome plated steel			
Sound Level	58 dBA			
Safety Switch	Mechanical lock-out switch			
Cord Length	120V Models: 50 ft (15 m) 240V Models: 75 ft (23 m)			
Cord Type	14-3 ST Safety Yellow (115V Model) 16-3 ST Safety Yellow (240V Model)			
Dimensions (L x W x H)	24 x 18 x 49 in 61 x 46 x 124 cm			
Machine Weight (lbs)	17" 1.0 HP: 93 1.5 HP: 118	20" 1.0 HP: 107 1.5 HP: 114	17" DS 1.5 HP: 86	20" DS 1.5 HP: 93
Shipping Weight (lbs)	17" 1.0 HP: 112 1.5 HP: 119	20" 1.0 HP: 126 1.5 HP: 133	17" DS 1.5 HP: 105	20" DS 1.5 HP: 112
Shipping Class	125			
Warranty	3 years parts, 1 year labor			
Productivity	17" Models		20" Models	
Polish	7,000 ft ² /hr (650 m ² /hr)		10,000 ft ² /hr (929 m ² /hr)	
Scrub	2,700 ft ² /hr (251 m ² /hr)		3,600 ft ² /hr (334 m ² /hr)	
Shampoo	1,200 ft ² /hr (111 m ² /hr)		1,430 ft ² /hr (133 m ² /hr)	
Spray Buff	2,700 ft ² /hr (251 m ² /hr)		3,100 ft ² /hr (288 m ² /hr)	

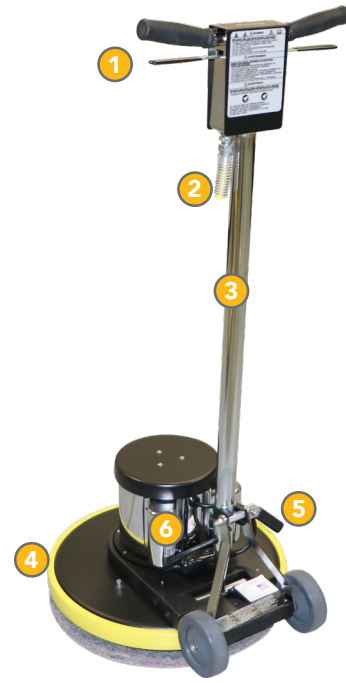

1. The mechanical lock-out prevents accidental activation or unauthorized use of the machine.
2. Reinforced cord strain relief prevents damage to the cord.
3. Sturdy 1.5-in tube handle is chrome-plated to resist corrosion.
4. A safety-yellow vinyl bumper surrounds the Mustang's skirt to protect walls and fixtures from accidental damage.
5. Ergonomic handle adjustment allows the operator to set the handle height for comfort and control.
6. Dual Speed (DS) Model. A switch on the motor allows the operator to quickly switch from low speed to high speed.



NSS ENTERPRISES, INC.

3115 Frenchmens Road
Toledo, OH 43607-2958
USA

(800) 677-1663 **TEL**
(419) 531-3761 **FAX**
info@nss.com

OPTIONS AND ACCESSORIES

ECOSTRIP



Ecostrip 400 pads are coated with a specially formulated diamond abrasive that can remove layers of floor finish without stripping chemicals.

Ecostrip Buff pads have a fine 8500 grit diamond coating that brings back the shine after scrubbing. Perfect for high traffic areas and restoration work.



Add a 3.5 gallon solution tank to your floor machine. The solution tank easily mounts on the handle. A hand operated valve controls solution flow and a tube delivers solution directly to a port in the skirt.